



- For surveillance of thermal critical areas
- Wide temperature range
0 °C to 300 °C @ ± 2 °C
- Optional 0 °C to 1,000 °C
@ ± 2 °C
- Wide area (19 * 12 m)
- CISPR 25 Class 5

IR Thermo Camera

The IRThermo6 is designed to observe the temperature of areas and devices in harsh electromagnetic environments or where low emission is required (e.g. EMC test facilities). The camera is covering an area of up to 19 * 12 m at a distance of 9.5 m (other lenses on request). It is specially suited to survey temperature critical rooms and devices, where overheating can lead to severe damage. There are different lenses available to cover various areas. An auto-focus function helps to get precise results under changing conditions.

The camera works like a regular IP camera with ONVIF support. Additionally a comfortable PC software allows to set the parameters like region of interest and temperature thresholds.

The IRThermo6 can be controlled by an HDCon6, HDcon6IP or HDCon5IR, which offer event detection (e.g. over heat) and a fail safe contact.

The camera is shielded up to 200 V/m. All signal lines are transferred via fibre optic cable.

Features:

- RF-Immunity 200 V/m up to 18 GHz
- Ethernet interface
- Comfortable PC software
- Fail safe contacts via controller

Applications:

- Temperature surveillance of absorbers in high field strength testing
- Survey device under test

Accessories:

required:

- Power supply
- IPCNV optical converter
- Fibre optic cables:
Variable lengths ST/FSMA-connector

optional:


- Tripods and wall mounts

IRThermo6

Technical Data

Image device	640 x 480 Pixel @32 Hz
Temperature resolution (NETD)	≤50mK@25
Temperature range (measurement)	0 °C to 300 °C (optional 0 °C to 1,000 °C)
Spectral range	8 to 14 µm
Frame rate	32 Hz
Area	19 x 12 m at a distance of 9.5 m other areas on request
Ambient temperature	0 to 50 °C
Relative humidity	20 up to 85 % RH non-condensing
Glass fibre	50 / 125 µm multimode glass fibre with STconnector
Operating temperature/humidity	0° to +50 °C / 20 to 80 % RH
Housing	Aluminium (5 mm)
External dimensions	100 mm x 100 mm x 170 mm (H x L x D)
Weight	2.5 kg
Immunity	200 V/m up to 18 GHz
Compliance	CISPR 25 Class 5, ISO 11452

Prices and specifications are subject to change without notice!

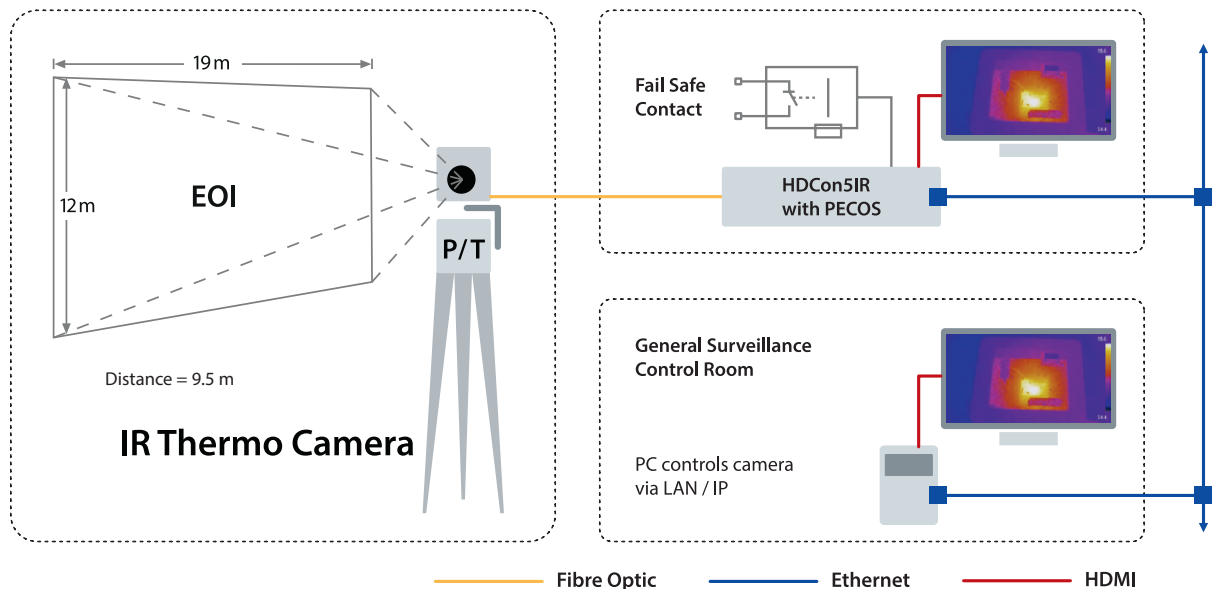

PONTIS EMC Products designed and manufactured by:

PONTIS
EMC PRODUCTS
A BRAND OF AUDIOVO

Audiovo GmbH
Irrenloher Damm 30
92521 Schwarzenfeld
Germany

Phone +49(9435) 54 19-0
Fax +49(9435) 54 19-19
info@audiovo.com
www.audiovo.com

You can contact directly our local partners for sales and technical support



www.hvtechnologies.com



india@pontis-emc.com



zongkui.shao@pontis-emc.com